


KASTEL wash

HK 1200 E ES



ORIG. DI ALIMENTAZIONE
POWER CORD SUPPLY
ORIG. D'ALIMENTATION
ORIG. DE ALIMENTACION

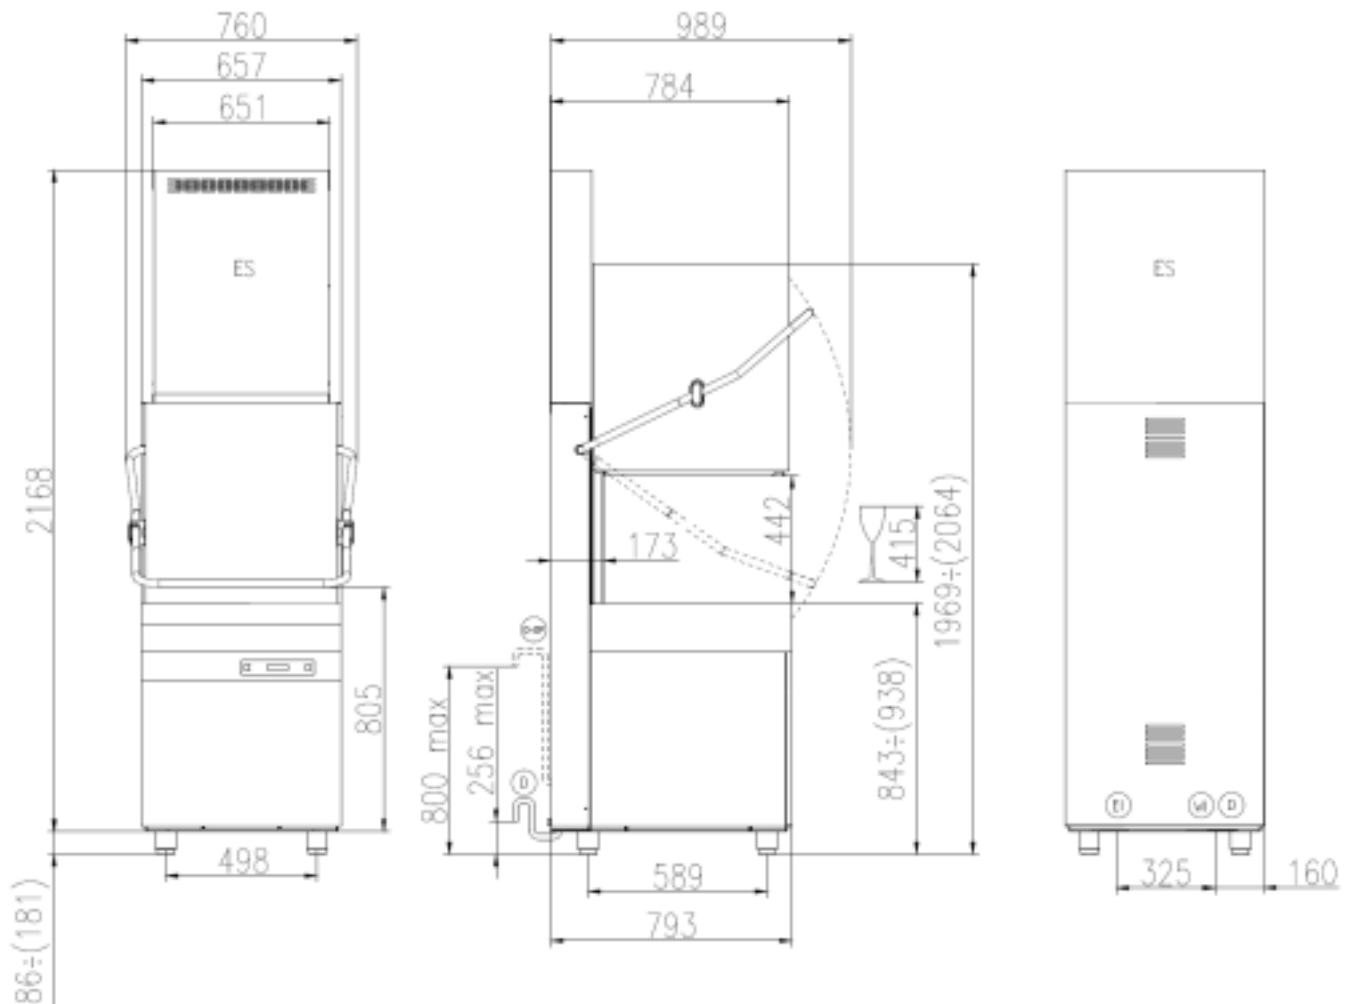

ORNA DI CARICO G 3/4 L=2000 mm
G 3/4 INLET HOSE L=2000 mm
TUYAU D'ALIMENTATION G 3/4" L=2000 mm
TUBO DE ALIMENTACION G 3/4" L=2000 mm



TUBO DI SCARICO ø 40 mm L=2000 mm
DRAIN HOSE ø 40 mm L=2000 mm
TUYAU DE VENTAGE ø 40 mm L=2000 mm
TUBO DE DESAGUE ø 40 mm L=2000 mm



TUBO DI SCARICO ø 29 mm L=2500 mm (CON POMPA SCARICO)
DRAIN HOSE ø 29 mm L=2500 mm (WITH DRAIN PUMP)
TUYAU DE VENTAGE ø 29 mm L=2500 mm (AVEC POMPE DE VENTAGE)
TUBO DE DESAGUE ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)

FC	Min 10°C-MAX 50°C
FC	Min 10°C-MAX 20°C with ENERGY RECOVERY
P	200±500Pa(2-5 Bar)
F	100±500Pa(1-5 Bar) with ATMOSPHERE FILTER
W	BARNESS: 5-207-2.8-1174